

Product Technical Sheet

T90ER

Pumped Electric Shower

Product Codes

T90ER Pumped	9kW	White	XE90ER91
--------------	-----	-------	----------

Installation

- Left-hand side water and cable entry points

Commissioning

- Inlet connection: 1/2" BSP compression
- Outlet connection: 1/2" BSP male thread

End User


- So quiet that when the water is running you won't hear the pump
- Ideal solution for stud walls which are more susceptible to vibration & noise transmission
- Integrated pump boosts the water pressure of low - pressure gravity fed supplies
- Easy prime pump allows water flow without the need to operate the pump
- Easy grip dials
- Adjustable Riser Rail
- Easily replaces older T90 models - Uses the same dimensions (footprint) and fixing points
- 2 year parts and labour guarantee
- Efficient A energy rating



T90ER

Pumped Electric Shower

Shower	
Temperature Control	Pumped electric stabilised
Power Ratings	9kW (230v)
Inlet Connection	1/2" BSP compression
Water Entry Points	Top, bottom, back (left hand side of unit)
Cable Entry Points	Top, bottom, back (left hand side of unit)
Outlet Connection	1/2" BSP
Plumbing System	Gravity Fed Cold Water Supply
Minimum Head Pressure	80mm
Maximum Head Pressure	10m
Surface Mounted Only	
Approvals, Complies with	BEAB, KIWA Reg 4, CE, UKCA, BSI Kitemark, IP24, Quiet Mark
Guarantee	2 years

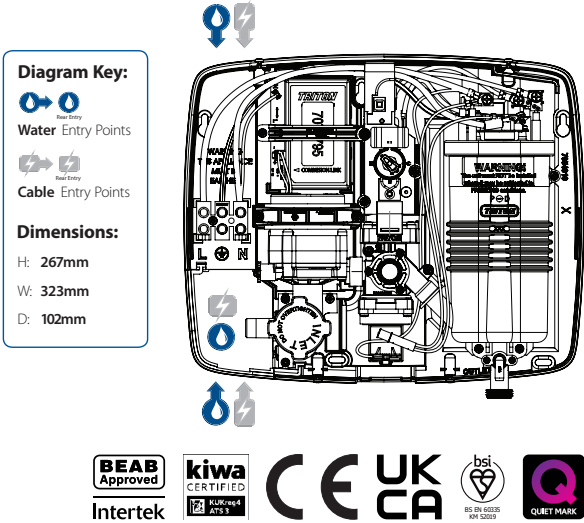

Riser Rail Kit	
Length	530mm
Diameter	22mm
Material	Stainless Steel
Finish	Polished
Hose	1.25m Double Anti-Twist Chrome

IMPORTANT MAINTENANCE NOTICE

Replacing with specified Triton accessories will aid optimum performance and keep the unit within the allocated guarantee period

