

Omnicare Design

Thermostatic Electric Shower

Product Codes

Omnicare Design 8.5kW with Extended Kit	TEOMND81
Omnicare Design 9.5kW with Extended Kit	TEOMND91

Installation

- Multiple pipe and cable entry points, a generous footprint and a fixing hole kit, the Omnicare Design is designed with ease of replacement in mind
- Suitable for connection with an analogue waste pump

Commissioning

- Simple 2 minute commissioning process

End User

- Large soft press start/stop button
- Power on illumination along with audible feedback allows ease of use for all users
- Tactile temperature dial with soft grey tones offers helpful visual contrast
- Looped lever handle with low resistance operation
- Constantly regulating water temperature within +/- 1°C, (BEAB Care standard)
- Set the duration of the shower ranging from 5 minutes to 30 minutes
- Extended Riser Rail 940mm
- 2m hose and a lower level handset holder offered with the Extended Riser Rail, providing flexibility for seated or standing showering
- Easy clean inclusive 5 spray pattern showerhead with removable spray plate



SAFETY CRITICAL
TRITON ACCESSORY

Omnicare Design

Thermostatic Electric Shower

Shower

Temperature stability	Thermostatic +/-1°C with Tri-Therm™
Power ratings	8.5kW & 9.5kW (at 240V)
Finish	White
Adjustable max temperature	41°C or 43°C
Timed auto shutdown	5, 10, 20 or 30 mins (default 20 mins)
Start/stop type	Electronic soft press button
	Start/stop button & temperature control dial
Audible feedback	Start/stop and timer end confirmation
Visual indicators	Power-on/timer/low flow illumination
Water connection	15mm swivel inlet (up/down)
Terminal block	16mm max cable
Waste pump connection(s)	Analogue
Water supply	Mains cold water
Water pressure min	Minimum maintained pressure: 0.5 bar Minimum maintained pressure for BEAB Care: 1.0 bar
Water pressure max	10 bar (static)
Removable pipe/cable trims	Top & bottom (15mm pipework & 38mm cable trunking)
Other installation aid(s)	Wall mounting template

Riser Rail Kit

Standard version

Length	940mm
Diameter	25mm
Material	Stainless Steel
Finish	Polished
Hose	2m Anti-twist Chrome

IMPORTANT MAINTENANCE NOTICE


Replacing specified Triton accessories for this Omnicare unit will aid optimum performance and keep the unit within the allocated guarantee period

Diagram Key:



Dimensions:

H: 387mm
W: 240mm
D: 116mm

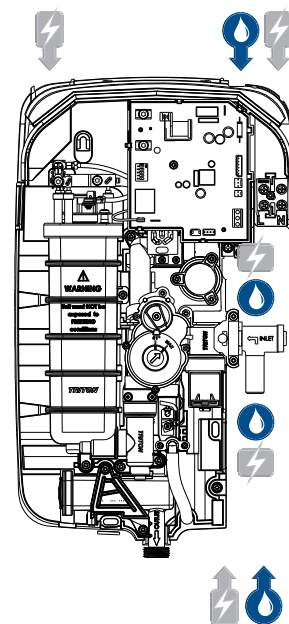

Omnicare Design Kit
GAOMDF1



2m Anti-twist Hose - Chrome
TSHG1266



Inclusive Showerhead
(5 Spray Pattern)
TSHECAREWHT

Contact our specification team

Call: 02476 324 776 | Email: specification@tritonshowers.co.uk | Web: www.tritonshowers.co.uk/specifiers

(1) Tri-Therm™ constantly regulating flow, blending water and adjusting the power to precisely control the showering temperature.
(2) Safe-Set™ tamper proof maximum temperature setting whilst allowing full rotation of the temperature dial.
(3) The shower will operate down to 0.5 bar at reduced flow rates.